


newline

Connect. Create. Collaborate.

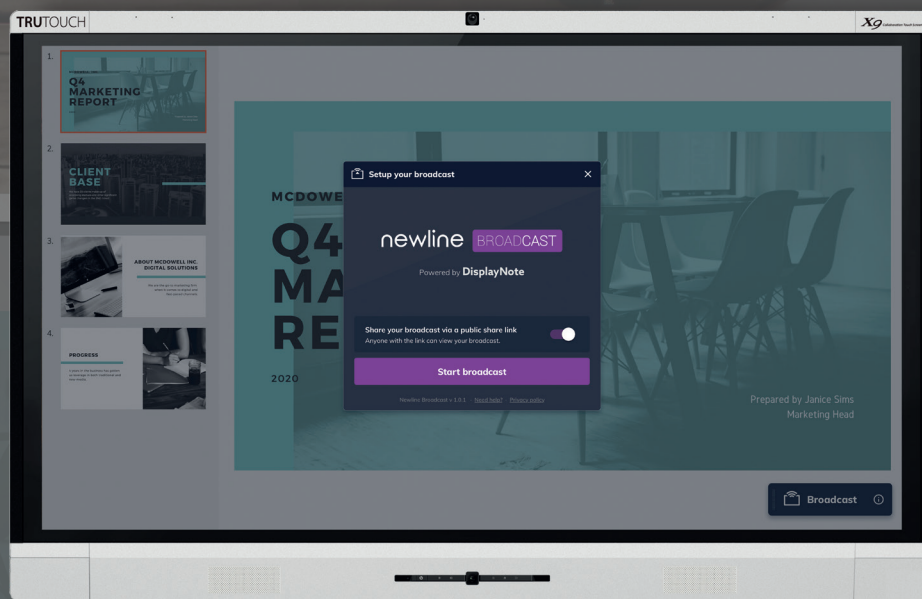

THE UNMATCHED ALL-IN-ONE UNIFIED COLLABORATION SOLUTION

The X Series features an all-in-one solution for collaboration that is immersive, unified and effective. X Series is designed to make your meetings more efficient. The two built-in 1080p wide-angle cameras let you be seen from anywhere in the room. The microphone array reduces noise and cancels echo. Your voice can be heard clearly. Advanced InGlass touch enables responsive touch for a smooth and intuitive writing experience as natural as writing on paper. Optical bonding gives you an ultra-wide 178° viewing angle. No matter where you sit in the room, the image is robust and clear.

X Series allows you to meet, conference and collaborate without limitations. Share voice, video, data and annotations. Work in documents simultaneously as if you were in the same room with the people in the conference call. With the instant digital discussion board and on-screen annotation tool you never let an idea slip away.

Newline X series features the following optional interactive ecosystem tools:

CAST

BROADCAST

DISPLAY MANAGEMENT

WORKSPACE

LAUNCH CONTROL

X Series

X Series

MODEL	X6		X8	X9
Display				
Backlight	LED			
Display Area	1428.48 x 803.52 mm	1650.24 x 928.26 mm	1897 x 1068 mm	
Active Screen Size	65"	75"	86"	
Display Ratio	16:9			
Resolution	3840 x 2160 Pixels			
Display Colors	8-bit	8-bit	10-bit	
Brightness	≥320nit	≥320nit	370nit	
Response Time	8ms			
Viewing Angle	178°			
Life Time	Minimum 30,000 hours			
Speaker				
Speaker position	Forward			
Rated Impedance	8Ω			
Frequency Response	20-18K Hz			
Output S.P.L.	≤13W			
Max.Power Output	2 x15W			
Microphone				
Sensitivity	-38dBV±3dB			
Frequency Response	65Hz - 12.5KHz			
Polar Patterns	Omni-directional			
THD +N (1kHz @ +4dBu)	<0.05%			
Pickup Range	8 meters			
Quantity	4 (1 Array)			
Camera				
Position	Top x 1 & Bottom x 1 (Only one can use in the same time)			
Sensor	2M Pixels			
Lens	86°			
Video Resolution	1920 x 1080@30fps (Max)			
Frame Rate	30fps/60fps			
Electrical				
Power Consumption	Maximum ≤220W Standby Mode ≤0.5W	Maximum ≤300W Standby Mode ≤0.5W	Maximum ≤450W Standby Mode ≤0.5W	
Working Voltage	AC 100-240V, 50/60Hz			
Touch				
Touch Surface	Optical Bonding Anti-Glare & Anti-Fingerprint Glass			
Surface Hardness	7H			
Touch Technology	InGlass™			
Touch Points	20 Points Touch in Windows/ 3 Points Touch in Embedded System			
Writing Tools	Stylus or Finger			
Communication Interface	USB-A			
Transportation/Storage				
Storage Temperature/Humidity	-10°C - 50°C/10% - 90% D51			
Working Temperature/Humidity	0°C - 40°C/10% - 90%			
Mounting (optional)	Wall-mounted / Floor Stand			
Outline Dimension	1568x1045x88mm	1792x1170x102mm	2039x1315x101mm	
Net Weight	45 kg	55 kg	71.6 kg	
Ports				
Front Interface Inputs	HDMI 1.4 (4K@30Hz) x 1, USB(Touch) x 1, USB (Dynamic) x 2, Microphone In x 1 AV			
Inputs	HDMI (4K@60Hz x 2, 4K@30Hz x 1), DP (4K@60Hz) x 1, USB (Touch) x 4 AV			
Outputs	HDMI Out (4K@60Hz) x 1, Line Out x 1, SPDIF out			
Other	USB2.0 x 2, RS232 x 1, RJ45 x 2, USB3.0 x 1, OPS Slots (4K@60Hz),DC 5V-2A out			
Speciality				
Build in Wi-Fi	2.4G/5G			

newline

NEWLINE INTERACTIVE INC.

101 East Park Blvd.
Suite 807 Plano,
TX 75074, USA
TEL: +1 888 233 0868

ASIA PACIFIC OFFICE

17F, No. 653, Bannan Rd.,
Zhonghe Dist., New Taipei Coty
235, Taiwan
TEL: +886 282282089

EUROPE OFFICE

Ronda de Poniente, N°2, 1st floor,
Oficina 1B, 28760,
Tres Cantos, Madrid, Spain
TEL: +34 911169178

INDIA OFFICE

Room No. 203, No.37, TTK Road,
Alwarpet, Chennai,
Tamil Nadu, India, 600018
TEL: +91 44 46945513

www.newline-interactive.com

2019 Newline Interactive Inc. Specification may vary by region, please contact our local offices for details. Actual product features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.